






HT 400 TIMBER-ALUMINIUM ENTRANCE DOOR




	Thermal insulation	U_D as low as 0.67 W/(m ² K)
	Noise reduction	up to 34 dB
	Security	up to RC2
	Locking	Multi-point locking
	Construction depth	85 mm



Square edge on inside and outside



Timber/Foam Insulation/Aluminium composite for maximum thermal performance

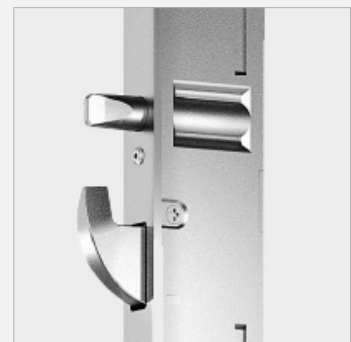


5-lever locking as standard for highest security


HT 400

Diagram

Section - bottom

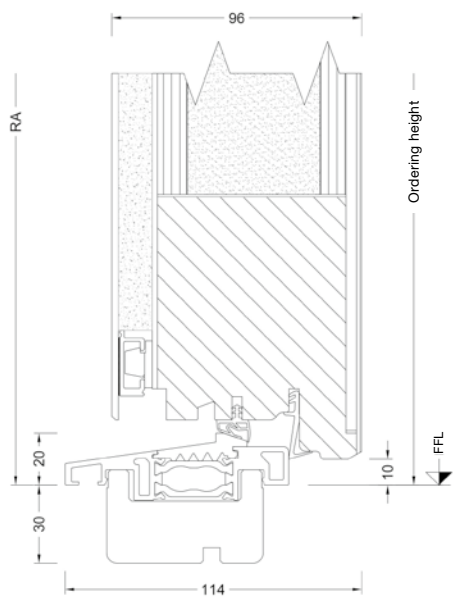

Side section - top

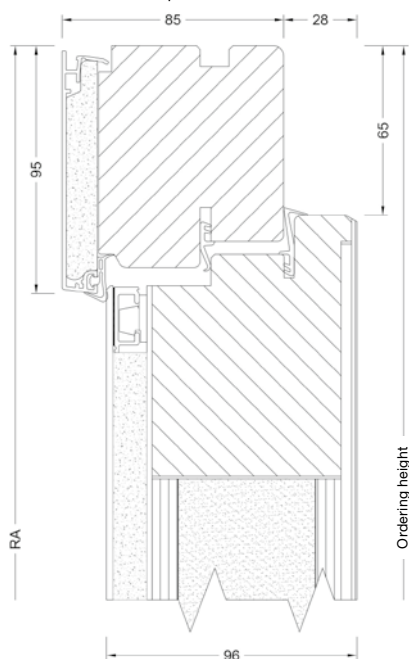

DR



PE



AG



PS

Further entrance door options can be found in the Door Designer:



Internorm Fenster GmbH

A-4050 Traun
Ganglgutstraße 131
T +43 (7229) 770-0
office@internorm.com

Internorm Windows UK Ltd

Unit D, Colindale Business Park
2-10 Carlisle Road, NW9 0HN, London
Tel.: +44 (0) 208 205 9991
Email: office@internorm.co.uk

3/2022

uk.internorm.com
commercial.internorm.com